


frozen table

design Matteo Ragni +
Maurizio Prina




STRUTTURA/STRUCTURE

PE - Polietilene/Polyethylene
colore base/basic colour



6310



C2 M9 N2 N4

16 34 87

GROSS WEIGHT:

kg 8,7

ACCESSORIES:

A4461


Sistema di fissaggio a
terra/Fixing kit system

A4601


Kit sabbia essiccata/
Dried sand kit

frozen table light

design Matteo Ragni +
Maurizio Prina

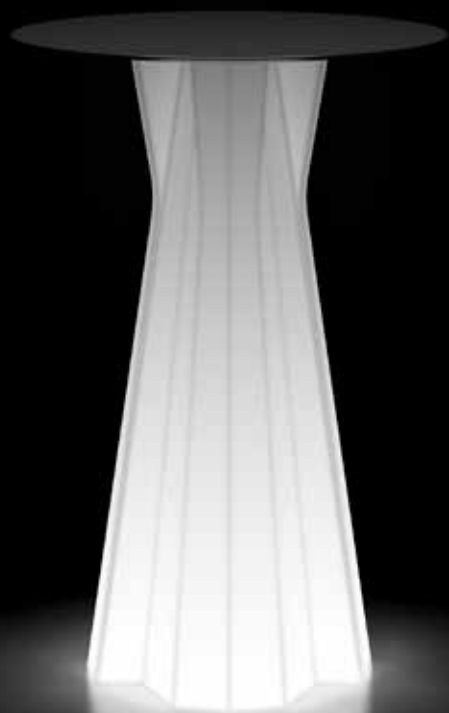

STRUTTURA/STRUCTURE PE - Polietilene/Polyethylene
colore base/basic colour



8310



98

GROSS WEIGHT:

kg 8,7

KIT LUCE/LIGHT KIT

A4744 kit LED RGB a batteria per interni/esterni bluetooth
bluetooth RGB LED light kit with battery indoor/outdoor

frozen table top

DETAILS:

Necessita di due
strutture per il piano/
Needs two structures for
the top
A4625
A4626
A4471

PIANO/TOP

.....



60




70



70



120



180

HPL

colore base/basic colour

.....

A4463



Cm 59x1 h

Kg 4,9


A4464



Cm 59x1 h

Kg 4,6


A4490



Cm 69x1 h

Kg 6,2

A4491



Cm 69x1 h

Kg 6

A4488



Cm 69x69x1 h

Kg 7,8

A4489



Cm 69x69x1 h

Kg 7,4


A4625



Cm 120x60x1 h

Kg 13,2

A4626



Cm 120x60x1 h

Kg 12,4

A4471



Cm 180x59x1,2 h

Kg 18,7

TESTS (ART. 6310)

.....

Declaration of conformity issued by



with the 180x60 cm top

Conforms to the requirements of resistance,
durability and safety, 2nd level EN 15372:2016

Tests carried out as per:

- EN 15372:2016, clause 6
- EN 15372:2016, clause 5.1 - 5.2
- EN 1730:2012, clause 6.2
- EN 1730:2012, clause 6.3
- EN 1730:2012, clause 6.4.2
- EN 1730:2012, clause 6.5
- EN 1730:2012, clause 6.6
- EN 1730:2012, clause 7.2

Attention to ensure stability under a vertical
pressure, the part must be stabilized according
to point 7.2 of EN 1730:2012.

To do this, inert material (es. dried sand)
must be poured into the hole at the bottom of
the base. The amount of the material will vary
according to the article:

- art. A4625/A4626 120x60 cm - kg 24
- art. A4471 180x60 cm - kg 24

Finally, close the hole by screwing the threaded
cap back on.