

frozen table structure

design Matteo Ragni +
Maurizio Prina



STRUTTURA/STRUCTURE

PE - Polietilene/*Polyethylene*
colore base/basic colour



6310



C2



M9



N4



34



87

8310



U1

GROSS WEIGHT:

kg 8,7

ACCESSORIES:

A4461


Sistema di fissaggio a
terra/*Fixing kit system*

A4601


Kit sabbia essiccata/
Dried sand kit

frozen table structure light

design Matteo Ragni +
Maurizio Prina

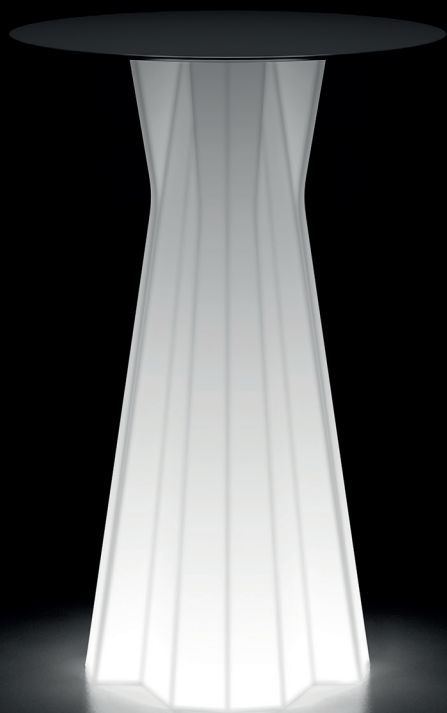

STRUTTURA/STRUCTURE PE - Polietilene/Polyethylene
colore base/basic colour



8310



U1

98

KIT LUCE/LIGHT KIT

GROSS WEIGHT:

kg 8,7

DETAILS:

Necessita di 1 Kit Luce/
Needs 1 Light Kit


- A4922** Kit luce senza lampadina indoor/Indoor light kit without bulb
A4923 Kit luce senza lampadina outdoor/Outdoor light kit without bulb
A4744 Kit LED RGB a batteria per interni-esterni bluetooth/
Bluetooth RGB LED light kit with battery indoor-outdoor

frozen table structure top


DETAILS:

Necessita di due
strutture per il piano/
Needs two structures for
the top
A4935


PIANO/TOP




60




60



70




70



70



70




120

HPL

colore base/basic colour


A4926



Cm 59x1 h

Kg 6,7

A4925



Cm 59x1 h

Kg 6,7

colore Premium/premium colour

A5040



A5041



Cm 59x1 h

Kg 6,8

A5042



A5043



Cm 69x1 h

Kg 8,2

A4927



Cm 69x1 h

Kg 8,2

A4928



Cm 69x1 h

Kg 8,2

colore Premium/premium colour

A5044



A5045



Cm 69x1 h

Kg 8,3

A5046



A5047



Cm 69x1 h

Kg 8,3

A4930



Cm 69x69x1 h

Kg 9,7

A4929



Cm 69x69x1 h

Kg 9,7

colore Premium/premium colour

A5048



A5049



Cm 69x69x1 h

Kg 9,8

A5050



A5051



Cm 69x69x1 h

Kg 9,8

A4935



Cm 120x60x1 h

Kg 12,5

TESTS (ART. 6310)

Declaration of conformity issued by **CATAS**

Conforms to the requirements of resistance,
durability and safety, 2nd level EN 15372:2016

Tests carried out as per:

- EN 15372:2016, clause 6
- EN 15372:2016, clause 5.1 - 5.2
- EN 1730:2012, clause 6.2
- EN 1730:2012, clause 6.3
- EN 1730:2012, clause 6.4.2
- EN 1730:2012, clause 6.5
- EN 1730:2012, clause 6.6
- EN 1730:2012, clause 7.2

Attention to ensure stability under a vertical
pressure, the part must be stabilized according
to point 7.2 of EN 1730:2012.

To do this, inert material (es. dried sand)
must be poured into the hole at the bottom of
the base. The amount of the material will vary
according to the article:

art. A4930/A4929 70x70 cm - kg 20

art. A4935 120x60 cm - kg 12 + kg 12 = kg 24

Finally, close the hole by screwing the threaded
cap back on.