

frozen table structure

design Matteo Ragni +
Maurizio Prina



ESTRUCTURA



PE - Polietileno
color básico

6310



C2



M9



N4



34



87

8310



U1

PESO BRUTO:

kg 8,7

COMPLEMENTOS:

A4461


Sistema de fijación en el
suelo

A4601

Kit de arena seca


frozen table structure light

design Matteo Ragni +
Maurizio Prina

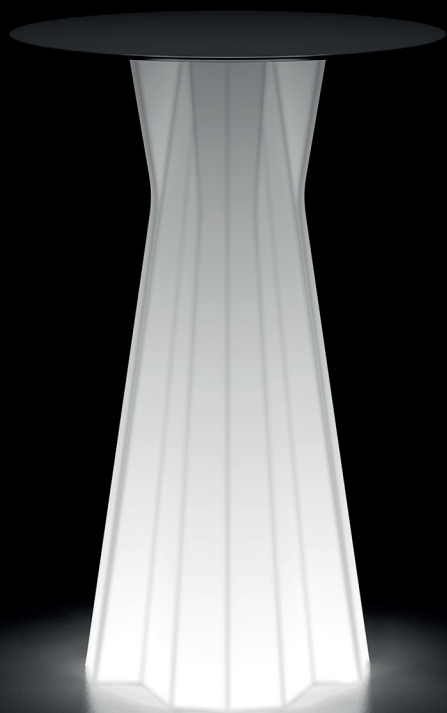


ESTRUCTURA

PE - Polietileno
color básico



8310



U1 98

PESO BRUTO:

kg 8,7

DETALLES:

Necesaria 1 Kit de
iluminación

KIT LUZ

A4922 Kit de iluminación sin bombilla interior

A4923 Kit de iluminación sin bombilla exterior

A4744 Kit LED RGB con batería para Bluetooth de interior y exterior

frozen table structure parte superior

DETALLES:

Necesita dos estructuras
para el parte superior
A4935


PARTE SUPERIOR

HPL

color básico

DIMENSIONES:

PESO BRUTO:

	A4926				Cm 59x1 h	Kg 6,7	
	A4925				Cm 59x1 h	Kg 6,7	
	color Premium						
	A5040					Cm 59x1 h	Kg 6,8
	A5042						
	A5043						
	A4927				Cm 69x1 h	Kg 8,2	
	A4928				Cm 69x1 h	Kg 8,2	
	color Premium						
	A5044					Cm 69x1 h	Kg 8,3
	A5046						
	A5047						
	A4930				Cm 69x69x1 h	Kg 9,7	
	A4929				Cm 69x69x1 h	Kg 9,7	
	color Premium						
	A5048					Cm 69x69x1 h	Kg 9,8
	A5050						
	A5051						
	A4935				Cm 120x60x1 h	Kg 12,5	

TESTS (ART. 6310)

Declaration of conformity issued by **CATAS**

Conforms to the requirements of resistance,
durability and safety, 2nd level EN 15372:2016

Tests carried out as per:

EN 15372:2016, clause 6
EN 15372:2016, clause 5.1 – 5.2
EN 1730:2012, clause 6.2
EN 1730:2012, clause 6.3
EN 1730:2012, clause 6.4.2
EN 1730:2012, clause 6.5
EN 1730:2012, clause 6.6
EN 1730:2012, clause 7.2

Attention to ensure stability under a vertical
pressure, the part must be stabilized according
to point 7.2 of EN 1730:2012.

To do this, inert material (es. dried sand)
must be poured into the hole at the bottom of
the base. The amount of the material will vary
according to the article:

art. A4930/A4929 70x70 cm – kg 20

art. A4935 120x60 cm – kg 12 + kg 12 = kg 24

Finally, close the hole by screwing the threaded
cap back on.