


frozen table structure

design Matteo Ragni +
Maurizio Prina




ESTRUCTURA



PE - Polietileno
color básico

6310



PESO BRUTO:

kg 8,7

COMPLEMENTOS:

A4461


Sistema de fijación en el
suelo

A4601

Kit de arena seca


frozen table structure light

design Matteo Ragni +
Maurizio Prina

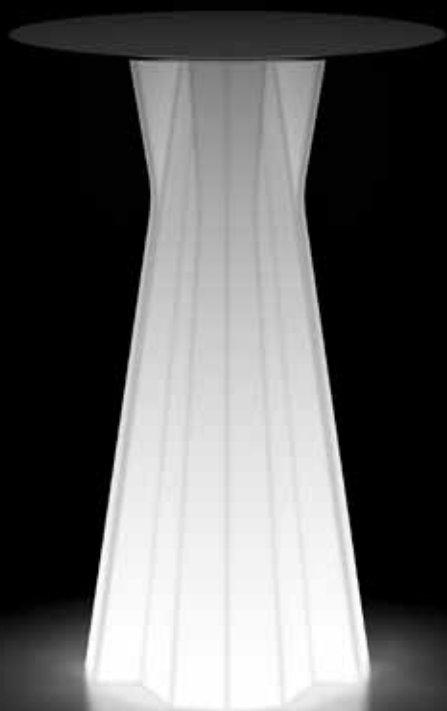

ESTRUCTURA

PE - Polietileno
color básico



8310



98

PESO BRUTO:

kg 8,7

KIT LUZ

A4744 kit LED RGB de batería para interior/exterior bluetooth

DETALLES:

Necesaria 1 Kit de
iluminación

frozen table structure parte superior

DETALLES:

Necesita dos estructuras para el parte superior

































A4625
A4626
A4471

PARTE SUPERIOR

HPL color básico

DIMENSIONES:

PESO BRUTO:

 60	A4463	  	Cm 59x1 h	Kg 4,9
	A4464	  	Cm 59x1 h	Kg 4,6
 70	A4490	  	Cm 69x1 h	Kg 6,2
	A4491	  	Cm 69x1 h	Kg 6
 70	A4488	  	Cm 69x69x1 h	Kg 7,8
	A4489	  	Cm 69x69x1 h	Kg 7,4
 120	A4625	  	Cm 120x60x1 h	Kg 13,2
	A4626	  	Cm 120x60x1 h	Kg 12,4
 180	A4471	  	Cm 180x59x1,2 h	Kg 18,7

TESTS (ART. 6310)

Declaration of conformity issued by



with the 180x60 cm top

Conforms to the requirements of resistance, durability and safety, 2nd level EN 15372:2016

Tests carried out as per:

EN 15372:2016, clause 6
EN 15372:2016, clause 5.1 - 5.2
EN 1730:2012, clause 6.2
EN 1730:2012, clause 6.3
EN 1730:2012, clause 6.4.2
EN 1730:2012, clause 6.5
EN 1730:2012, clause 6.6
EN 1730:2012, clause 7.2

Attention to ensure stability under a vertical pressure, the part must be stabilized according to point 7.2 of EN 1730:2012.

To do this, inert material (es. dried sand) must be poured into the hole at the bottom of the base. The amount of the material will vary according to the article:

art. A4625/A4626 120x60 cm - kg 24
art. A4471 180x60 cm - kg 24

Finally, close the hole by screwing the threaded cap back on.